


WHEN LOOKS MATTER.

Discover the New
Soltaro All-In-One ESS



All-in-One ESS IP65 Range
Australian Designed & Engineered
Wall Mounted, IP65 for outdoor application
Stackable, to grow with you
Available in Hybrid or AC Coupled Inverter Options

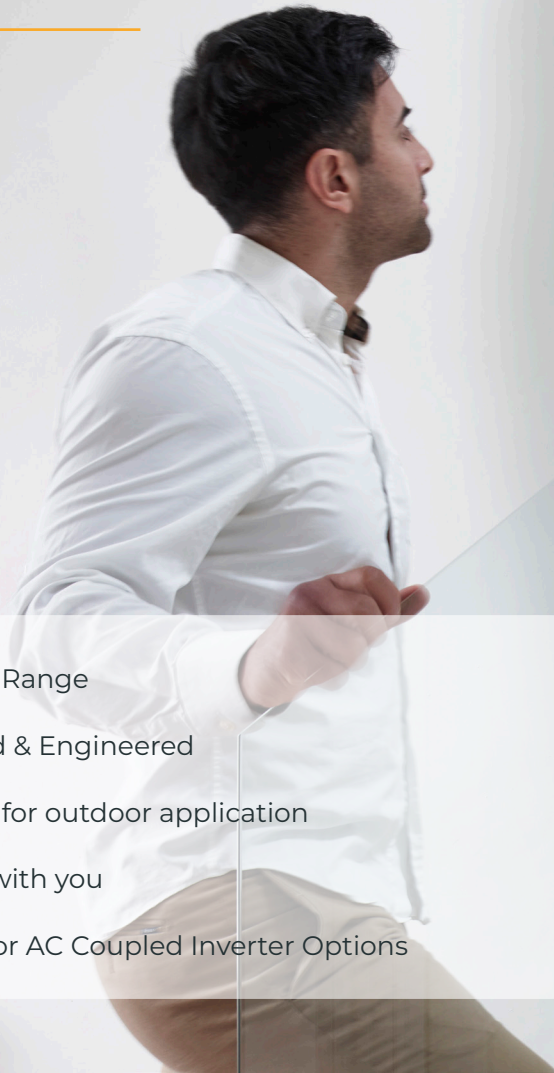

10 Year Warranty
or 10,000
Charging Cycles



Local &
Remote
Monitoring



Plug and Play



Expandable
Storage



Expert
Engineering



Clean Energy

WANT TO KNOW MORE? - VISIT WWW.SOLTARO.COM

GET IN TOUCH | CALL US ON

+61 1300 276 582 **AUS** / +44 1909 807 577 **EUR**



DEVICE SHORT NAME	Hyper-3KW	Hyper-3/68KW	Hyper-5KW
PV STRING INPUT (DC)			
Max. DC Input Power (W)	3900W	4600W	6500W
Max. DC Input Voltage (V)	550V	550V	550V
MPPT Voltage Range (V)	125~500V	125V~500V	125V~500V
Max. Input Current (A)	12.0A	10.0A/10.0A	10.0A/10.0A
Max. Short Circuit Current (A)	15.0A	14.0A/14.0A	14.0A/14.0A
No. of MPP Trackers	1	2	2
Strings per MPP Tracker	2	1	1
Galvanic Isolation for PV Modules	Transformerless	Transformerless	Transformerless
BATTERY INPUT SIDE			
Battery Capacity	LiFePO4 2KWH/2.5KWH/4.5KWH/5KWH (Maximum 5 modules of the same type)		
Nominal Battery Voltage	48V	48V	48V
Battery Voltage Range	40-60V	40-60V	40-60V
Galvanic Isolation for Battery	YES	YES	YES
Max. Charge Current*1	60A	60A (Optional 75A)	100A
Max. Discharge Current*2	60A	60A (Optional 75A)	100A
Protection	Over Voltage, Less Voltage, Over Current, Short Circuit, Over Temperature Lithium Ion: 0~100% DOD Adjustable, Lead Acid: 0~50 DOD Adjustable		
GRID AC OUTPUT (ON-GRID)			
Nominal Apparent Power Output to Utility Grid (VA)	3000VA	3680VA	5000VA
Maximum Apparent Power Output to Utility Grid*3	3000VA	3680VA	5000VA
Nominal Output Voltage (V)	230V	230V	230V
Nominal Output Frequency (HZ)	50/60 HZ	50/60 HZ	50/60 HZ
Max. AC Current Output to Utility Grid (A)	13 A	16 A	21.7 A
Max. AC Current from Utility Grid (A)	26 A	32 A	30 A
Output Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)		
Output THDI (@Nominal Output)	<3%	<3%	<3%
EPS AC OUTPUT DATA (BACK-UP)			
Max. Output Apparent Power (VA)	3000VA	3680VA	5000VA
Max. Output Current (A)	16 A	17.4 A	21.7 A
Nominal Output Voltage (V)	230(±2%)	230 (±2%)	230 (±2%)
Nominal Output Frequency (HZ)	50/60 (±2%)	50/60 (±2%)	50/60 (±2%)
Output THDv (@Linear Load)	<3%	<3%	<3%
EFFICIENCY			
MPPT Efficiency	99.9%	99.9%	99.9%
Euro Efficiency	97.0%	97.0%	97.0%
Max. Efficiency	97.5%	97.5%	97.5%
Max. Battery to Load Efficiency	95%	95%	95%
Standby Power Losses	<0.5W	<0.5W	<0.5W
Topology	High Frequency Isolation	High Frequency Isolation	High Frequency Isolation
PROTECTION			
Anti-islanding Protection	YES	YES	YES
PV String Input Reverse Polarity Protection	YES	YES	YES
Insulation Resistor Detection	YES	YES	YES
Residual Current Monitoring Unit	YES	YES	YES
Output Over Current Protection	YES	YES	YES
Output Short Protection	YES	YES	YES
Output Over Voltage Protection	YES	YES	YES
GENERAL DATA			
DC Switch	Optional	Optional	Optional
Dimensions (W*H*D) (mm)	414*N/1242/145mm	414*N/1374/145mm	414*N/1374/145mm
Net Weight (KG)	66KG/104KG/142KG	66KG/104KG/142KG	73KG/111KG/149KG
Protection Degree	IP 65	IP 65	IP 65
Mounting Information	Wall Bracket	Wall Bracket	Wall Bracket
Operation Temperature Range	(20°C~+60°C(45°C derating))	(20°C~+60°C(45°C derating))	(20°C~+60°C(45°C derating))
Noise Emission (typical) (dB)	<25db	<25db	<25db
User Interface	APP	APP	APP
Communication with BMS*5	RS 485 & CAN	RS 485 & CAN	RS 485 & CAN
Communication with Meter	RS 485	RS 485	RS 485
Communication with Portal	Wi-Fi	Wi-Fi	Wi-Fi
Relative Humidity (%)	0~95%	0~95%	0~95%
Site Altitude (m)	<400m	<400m	<400m
Cooling Concept	Natural Convection	Natural Convection	Natural Convection
CERTIFICATIONS & STANDARDS			
Grid Regulation	VDE-AR-N 4105, VDE0126-1-1, AS4777.2, G83/2, G59, CE10-21, NRS 097-2-1, En50438		
Safety Regulation	IEC/EN62109-1&2, IEC62040-1		
EMC Standard	EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN61000-4.16, EN6100-4.18, EN6100-4.29		
Warranty	5-10 Years Standard Warranty (dependent on territory)		

*1 N is the number of battery modules
*3 21.7A for AS4777.2
*5 The standard configuration is CAN

*2 4600 for VDE 0126-1-1 & VDE-AR-N4105, 4950 for AS4777.2, 4050 for CE10-21
*4 Can be reached only if PV and battery power is enough